


Miniature DIN-Rail Mount Programmable Isolated Load Cell Transmitter Model DPM-9004 AL



DESCRIPTION

Model DPM-9004 AL

The Model DPM-9004 AL is a miniature space saving 92 x 92 x 26 mm DIN rail mount programmable load cell transmitters. Configuration and field calibration is done via a notebook computer or desktop PC using the user-friendly software available from our WebSite. Complete 3-way isolation is provided between power supply, input and output.

The transmitter is designed for mV inputs from load cells, strain gauges and strain gauge pressure transmitters. The stable bridge excitation voltage is user selectable for normal or Is (barriered) applications, and can power four load cells with the standard 10V excitation. Sense feedback is included to compensate for cable loss. The precision instrumentation op-amp front end circuit ensures high accuracy & stability. The digital filter feature allows for a stable-output in noisy systems. The isolated analogue output is configurable for industry standard 0-10V or 0-20 / 4-20mA signals. The power supply is 95-265V AC/DC as standard.

The serial interface allows connections to remote computers and SCADA systems using DPM's DIGIbus protocol. The RS485 option allows up to 99 transmitters to be linked on the same bus.

A feature of this programmable transmitter is the calibration method. Pre-calibrated ranges can be allocated zero and full scale values and these can be adjusted on site via a notebook to allow for dead-weight offset and a single point span calibration (test weight trim).

FEATURES

- DIN rail mount 92 x 92 x 26 mm enclosure, UL 94 V-0 flame retardant plastic
- User selectable excitation for normal or barriered applications.
- Powers up to 4 load cells as standard with a 10V excitation.
- 6-wire load cell system (sense feedback included).
- Fully programmable via a laptop or desktop PC.
- Suitable for load cell sensitivities up to 3.00mV/V.
- Low cost - high performance design
- 0-10V, 0-20mA or 4-20mA analogue output with programmable zero & span
- Complete 3-way isolation between power supply, input and output.
- RS232 serial communications standard with DIGIbus protocol.
- Meets European EMC directive 89/336/EEC & Low Voltage directive 73/23/EEC
- 3 year guarantee

OPTIONS

Model DPM-3001-P AL Two set points (solid-state relays)

Model DPM-3002 AL RS485 serial interface

Model DPM-3004-P AL One set point (solid-state relay)

E	Miniature DIN-Rail Mount Programmable Isolated Load Cell Transmitter Model DPM-9004 AL	Andreas Lang GmbH Industrievertretung & Service Bahnhofstraße 33 D - 61137 Schöneck Telefon: +49 (0) 6187 88 54 +49 (0) 6187 88 60 Telefax: +49 (0) 6187 88 71 WebSite: www.alanggmbh.de E-Mail: info@alanggmbh.de
----------	---	---

SPECIFICATIONS

GENERAL

Setup and calibration	Full digital with visual prompting via Smart View software
Memory retention	Full non-volatile operation
Digital filter	Low pass with user selectable values

INPUT AMPLIFIER

Sensitivity adjust	Up to 3.00 mV/V full scale (2.00 mV/V default)
Zero drift	0.1 μ V / °C typically
Span drift	20 ppm / °C typically
Input impedance	20 M Ω
Accuracy & linearity	0.05% of full scale, \pm 1 display count
Warm-up time	20 minutes
Noise	< 0.5 μ V p-p

EXCITATION – Link Selectable

10V	Up to 4 x 350 Ω load cells (default for most applications)
10V	Up to 8 x 1000 Ω load cells
5V	Up to 8 x 350 Ω load cells
5V	For barriered applications up to 2 load cells
3.3V	For barriered applications up to 4 load cells
Load cell connection	6 wire + shields (sense included)

A/D CONVERTER

A/D Type	20 bit sigma delta
Resolution	1 000 000 internal counts
A/D conversion rate	Approximately 5 per second

DIGITAL INPUTS

Digital input on terminal 7	Remote input for tare function
-----------------------------	--------------------------------

ANALOGUE OUTPUT

Analogue output isolation	1000V input/output/power isolation (3-way)
Analogue output accuracy	0.1% of full scale
Analogue output resolution	12-bits
Analogue output temp. coefficient	20 ppm / °C typically
Current analog output load	500 Ω maximum (current is source, not sink)
Voltage analog output load	10k Ω minimum

SERIAL INTERFACE OPTIONS

Serial interface	RS-232 standard or RS-485 optional
Baud rates	2400, 4800, 9600 & 19200
Isolation to input	No
Capabilities of DIGibus protocol	Full remote control

SET POINT OPTIONS

Solid-state relay rating	400V AC/DC, 0.5A, power factor 1
Form Type	Form A (normally open contact)

E

Miniature DIN-Rail Mount Programmable Isolated Load Cell Transmitter Model DPM-9004 AL

Andreas Lang GmbH
 Industrievertretung & Service
 Bahnhofstraße 33
 D - 61137 Schöneck
 Telefon: +49 (0) 6187 88 54
 +49 (0) 6187 88 60
 Telefax: +49 (0) 6187 88 71
 WebSite: www.alanggmbh.de
 E-Mail: info@alanggmbh.de

ENVIRONMENTAL

Operating temperature range	-10°C to +50°C
Service temperature range	-15°C to +60°C
Storage temperature range	-40°C to +80°C
Humidity	< 85% non-condensing

MECHANICAL SPECIFICATIONS

Dimensions	DIN rail mount 92x92x26mm enclosure, IP40 rating
Protection	Industrial strength, UL 94 V-0 flame retardant ABS plastic

POWER SUPPLY OPTIONS

Switching power supply	Yes, 95V – 265V AC/DC isolated supply, 10VA typical
------------------------	---

REGULATORY COMPLIANCE

Regulatory requirements	Complies with EC Directives 89/336/EEC & 73/23/EEC
-------------------------	--

ORDERING EXAMPLE


Option modules (see front page)
MODEL DPM-9004 AL – DPM-3001-P AL „Programmable load cell transmitter with dual alarm option“

PROGRAMMABLE SETTINGS

The following ranges can be set with the SmartView software, available from our WebSite.



LOAD CELL INPUT		ANALOG OUTPUT	
Load cell sensitivity	:0.00 to 3.00 mV/V	Output type	:0-20mA/4-20mA/0-10V
Zero & span setting	:-1999 to 20000	Zero & span setting	:-1999 to 20000
Decimal point	:On all digits		
Digital filter	:0, 1, 2 or 4 secs	OPTIONS	
		Alarm values	:-1999 to 20000
SERIAL INTERFACE		Alarm hysteresis	:0 to 255 (default 1)
Bus address	:0 to 99	Alarm delay	:0 to 255 seconds (default 0)
Baud rate	:2400, 4800, 9600, 19k2	Alarm relay settings	:Selectable HI or LO alarm
		Alarm relay state	:Selectable NO or NC

HOUSING DIMENSIONS

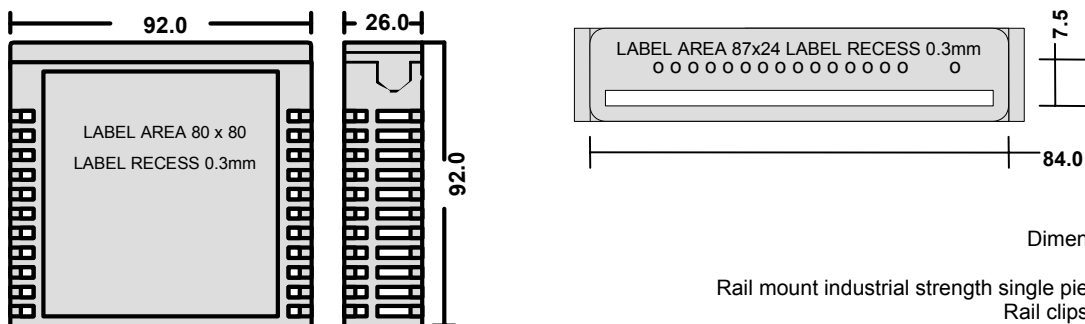

E	Miniature DIN-Rail Mount Programmable Isolated Load Cell Transmitter Model DPM-9004 AL	Andreas Lang GmbH Industrievertretung & Service Bahnhofstraße 33 D - 61137 Schöneck Telefon: +49 (0) 6187 88 54 +49 (0) 6187 88 60 Telefax: +49 (0) 6187 88 71 WebSite: www.alangmbh.de E-Mail: info@alangmbh.de
----------	---	---

INTERNAL LINKS & CONNECTION DIAGRAM

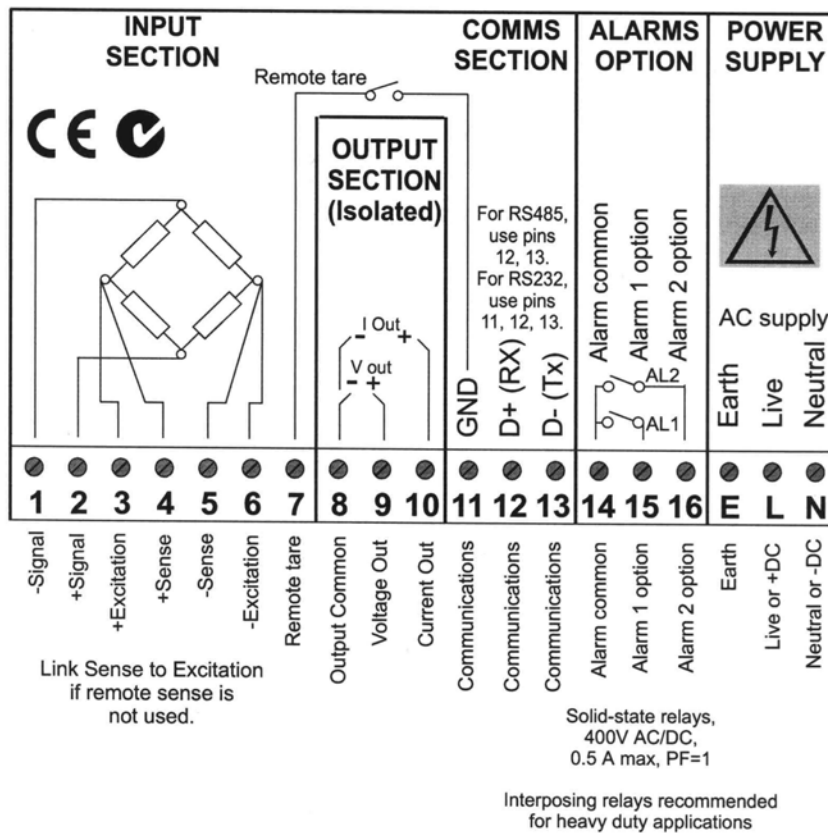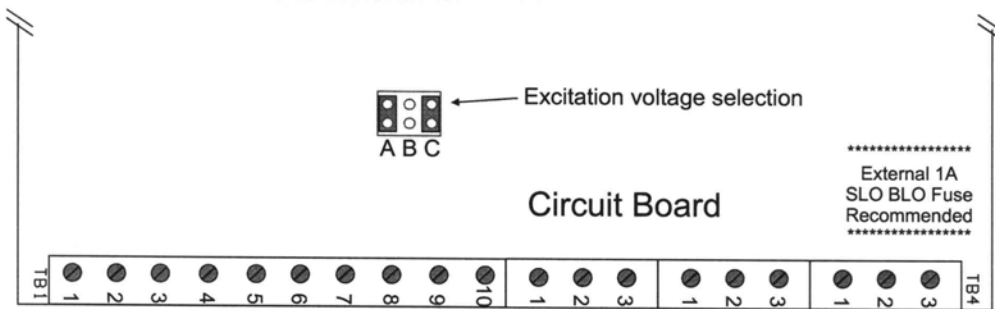

GUARANTEE

This product is guaranteed against faulty workmanship or defective material, for a period of 3 (three) years from date of delivery by Andreas Lang GmbH.

Andreas Lang GmbH undertakes to replace without charge all defective equipment which is returned to it (transportation costs prepaid) during the period of guarantee, provided there is no evidence that the equipment has been abused or mishandled in any way. Andreas Lang GmbH reserves the right to alter any specification without notice.

E	Miniature DIN-Rail Mount Programmable Isolated Load Cell Transmitter Model DPM-9004 AL	Andreas Lang GmbH Industrievertretung & Service Bahnhofstraße 33 D - 61137 Schöneck Telefon: +49 (0) 6187 88 54 +49 (0) 6187 88 60 Telefax: +49 (0) 6187 88 71 WebSite: www.alangmbh.de E-Mail: info@alangmbh.de
----------	---	---

• Andreas Lang GmbH reserves the right to alter any specification without notice.
 • © Andreas Lang GmbH
 • Stand Januar 2003